



Specifications

Electrical Ratings	50mA @ 50VDC	Dielectric Strength	1000Vrms min
Electrical Life	100,000 cycles typical	Insulation Resistance	$\geq 100M\Omega$ min
Contact Resistance	$\leq 50m\Omega$ initial	Operating Temperature	-40°C to +85°C
Actuation Force	160gF $\pm$ 50gF 260gF $\pm$ 50gF	Storage Temperature	-40°C to +85°C
Actuation Travel	.25 $\pm$ 0.1mm		





Materials

Actuator	4/6 Nylon
Base	4/6 Nylon
Cover	Stainless Steel
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated


Ordering Information

1. Series	CS1104	3.8	F180
CS1104			
2. Actuation Length "L"			
3.8 = 3.8mm			
7.0 = 7.0mm			
3. Actuation Force			
F160 = 160gF			
F260 = 260gF			

Dimensions

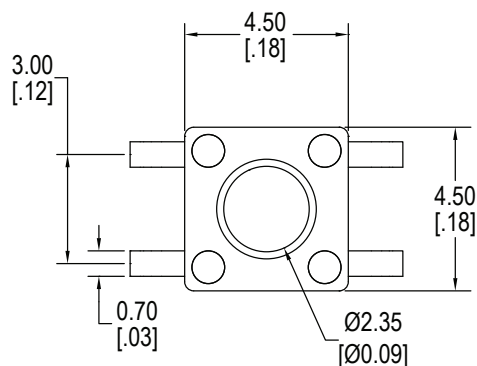

Schematic

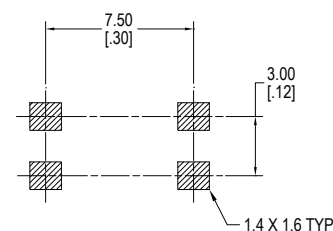

PC Layout